

Telia X2 (Technicolor DGA4330) ruuteri seadistamine


Telia X2 ruuteris tuleb esmalt deaktiveerida ruuteri 2.4GHz võrgul 802.11n standard, võimaldades vaid 802.11b/g ühendust.

Ruuteri konfiguratsioonilehele pääsemiseks veendu, et arvuti või nutiseade on ühendatud koduvõrguga võrgukaabli või WiFi kaudu. Seejärel navigeeri veebilehitsejas aadressile 192.168.1.1

1. Kasutajanimi on vaikimisi "user"

2. Parooli leiad ruuteril alumiselt küljelt märgisega "Web Access Key"

3. Logi sisse

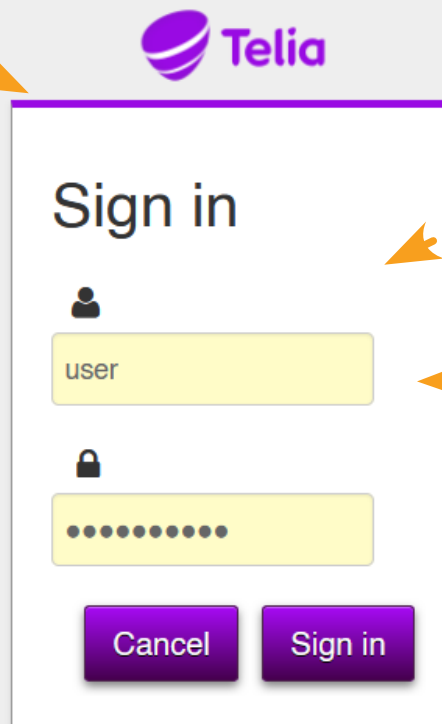


The standard Username is: user

The default Password is printed on the bottom of the MediaAccess Gateway (ACCESS KEY).

© Technicolor 2021



1.Vali "Advanced interface"

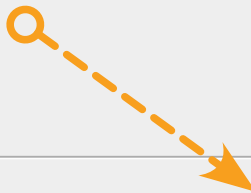

user




Simplified guided
view

Advanced
interface

© Technicolor 2021



1.Vali "Wireless"

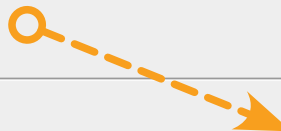

user



Gateway

Version Cobalt (18.3)



Broadband

Ethernet connected



Internet Access

DHCP on

WAN IP is 62.65.53.120/22

IPTV IP is 10.246.166.72/22



Wireless

#Telia-A62A4A5(2.4GHz)

#Telia-A62A4A5(5GHz)



Local Network


DHCP enabled

Gateway IP is 192.168.1.1

and netmask is

255.255.255.0

IPv6 Assigned



Devices

0 Ethernet devices

connected

2 Wi-Fi devices connected



WAN Services

0 port forwarding rules are
defined

0 UPnP rules are active



Teleph...

OFF

Telephony disabled



Diagnostics



Content Sharing

Samba Filesharing
disabled

DLNA disabled



Parental Controls

Site blocking disabled

0 site blocking rules are
defined



IP Extras

9 Routes

0 IPv4 Static Routes

7 DNS Servers



Wireless

hide advanced

1. Vajuta
"show advanced"

Wireless

ACCESS
POINTS
2.4GHZ

#Telia-A6...

ACCESS
POINTS
5GHZ

#Telia-A6...

WIRELESS
DATA

Interface

Enabled ☒

Frequency band 2.4GHz

MAC address d4:35:1d:a6:2a:4a

Standard 802.11b/g

Speed 802.11b/g

Channel Auto

Region EU

Current channel 1

Channel Width Auto (20/40MHz)

2. Vali "802.11b/g".

3. Salvesta
muudatus

Cancel

Save